

NPA


New Product Announcement

MILLING

38-2020

SEPTEMBER 2020 • INCH

PAGE 1 / 3

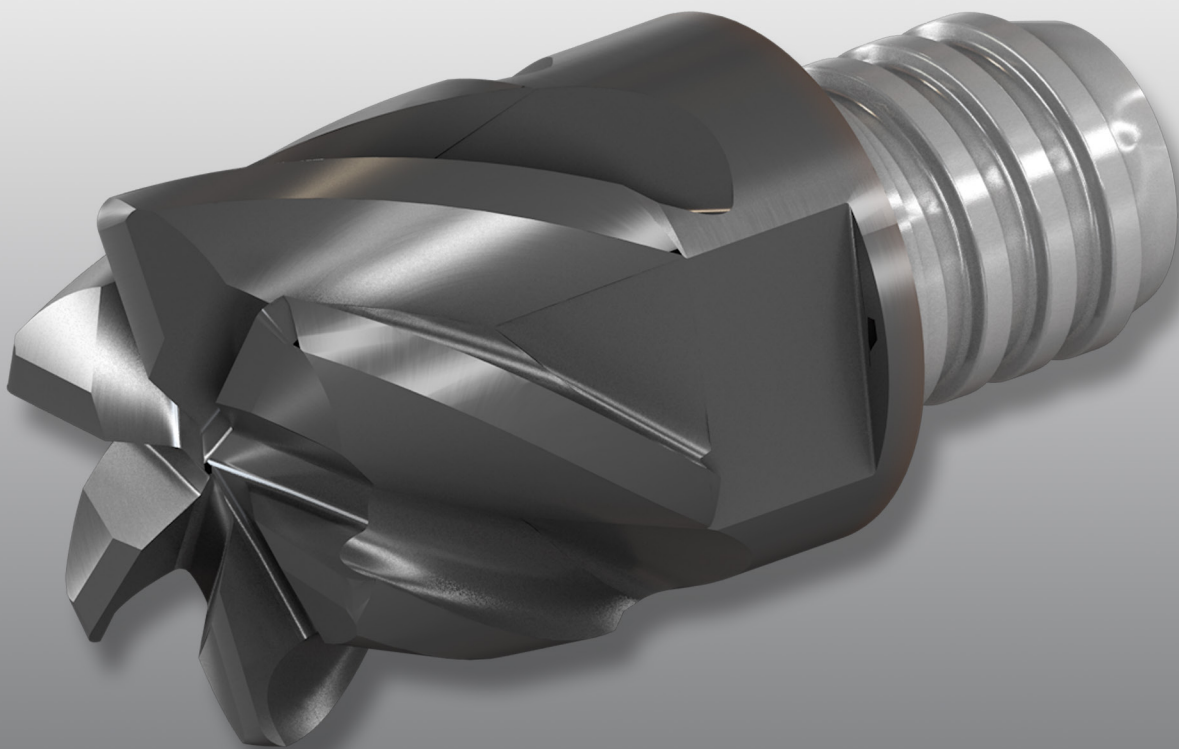

**Ultimate Solution
for Titanium**

MULTI-MASTER
INDEXABLE SOLID CARBIDE LINE

**Upgrading MULTI-MASTER Endmill Products:
New Geometry, More Capabilities**

Highlights

ISCAR is expanding the MULTI-MASTER family by introducing new exchangeable solid carbide MM ECK... milling heads with different helix and variable pitch.

The new MM ECK... milling heads have 6 cutting edges and are available in nominal diameters of .312 - 1.000". The head corner radii vary from .0150 to .0400", depending on the head diameter.

The advantageous combination of different helix and variable pitch, which has already proven itself in the popular ISCAR CHATTERFREE solid carbide endmills and MULTI-MASTER heads, significantly improves tool dynamic behavior and ensures stable cutting in various milling applications even in unfavorable machining conditions.

The MM ECK heads have been designed specifically for machining titanium and titanium alloys (ISCAR material groups 36 and 37), including hard-to-cut β - and near β - alloys such as Ti-10V-2Fe-3Al and Ti-5Al-5Mo-5V-3Cr, especially by trochoidal milling technique. This important design features, differentiates the new heads from the existing MULTI-MASTER CHATTERFREE items.

The MM ECK... milling heads are available in IC908 carbide grade.

Cutting data

The table with the head dimensions below specifies the range of feeds per tooth. In trochoidal milling, the width (radial depth) of cut should be up to 15% of the head nominal diameter.

For more detailed cutting data recommendations, please refer to our Reference Guide for Machining Titanium.

Click Link to See Short Video


▶ <https://youtu.be/ZAghRI7RXzA>

MULTI-MASTER
High reliability and high dimensional repeatability for high-efficiency milling

MULTI-MASTER
INDEXABLE SOLID CARBIDE LINE

MM ECK-CF

Six-Flute Heads with 35°/37° Helix Featuring Different Corner Radii

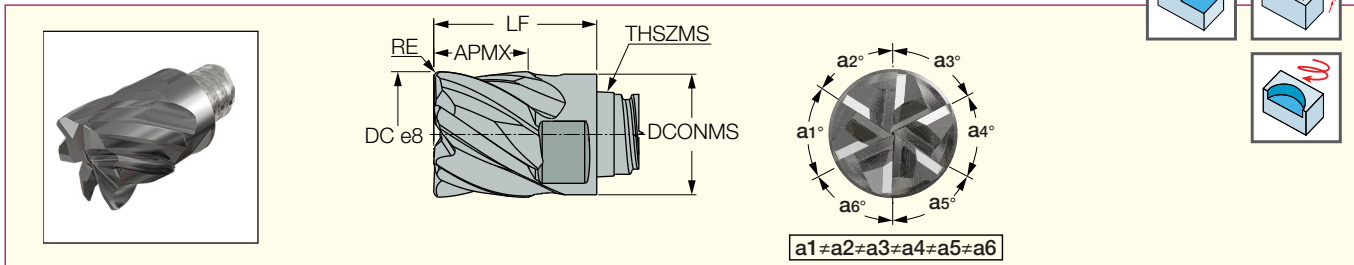

Designation	Dimensions									IC908	Recommended Machining Data
	DC	RE	NOF ⁽¹⁾	APMX	THSZMS	DCONMS	LF	RMPX ⁽²⁾	fz (inch/t)		
MM ECK.312H20R015-6T05CF	.312	.0150	6	.200	T05	.303	.394	5.0	●	.0016-.0031	
MM ECK.375H27R020-6T06CF	.375	.0200	6	.270	T06	.366	.512	5.0	●	.0016-.0031	
MM ECK.500H37R020-6T08CF	.500	.0200	6	.370	T08	.488	.650	5.0	●	.0016-.0031	
MM ECK.625H47R030-6T10CF	.625	.0300	6	.470	T10	.602	.807	5.0	●	.0028-.0047	
MM ECK.750H62R040-6T12CF	.750	.0400	6	.620	T12	.726	1.004	5.0	●	.0028-.0047	
MM ECK1.00H86R040-6T15CF	1.000	.0400	6	.860	T15	.941	1.457	5.0	●	.0028-.0047	

• Do not apply lubricant to the threaded connection.
⁽¹⁾ Number of flutes ⁽²⁾ Maximum ramping angle