


# GPS

Deep Drilling Solid Carbide Guide Pads

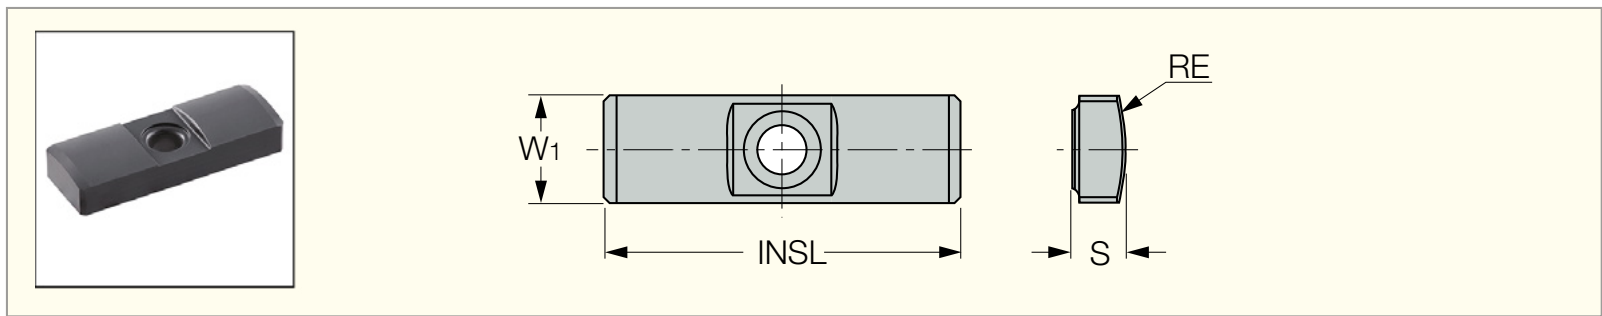


Designation	Dimensions					Tough ↔ Hard
	W1	RE	INSL	S	IC928	IC908
GPS-04-16-055-DC	4.0	5.50	16.00	2.0	●	●

## Spare Parts

Diameter Range	Insert	Insert Clamping Screw	Key	N·m	Solid Carbide Guide Pad	Guide Pad Clamping Screw	Key	N·m
12.00-13.99	LOGT 060204R-DT	SR 10503833L040	T-7F	0.9	GPS-04-16-055-DC	TS 20043I/HG-P M2X0.4	Wrench IP-6/5	0.65

## Universal Marking for Deep Drilling Tools

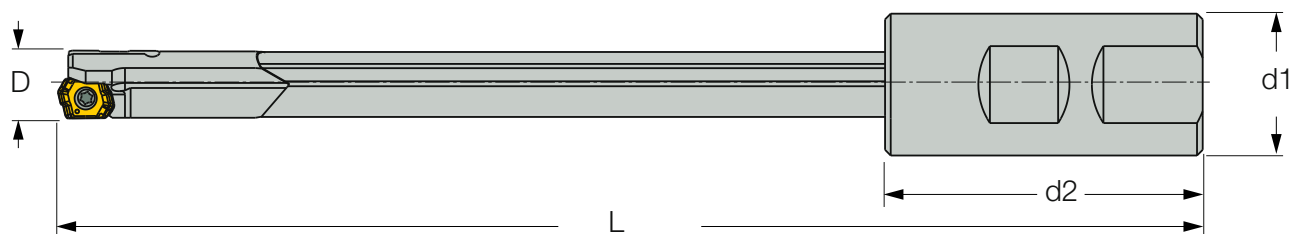

**D\*\*.\*\***



D

**L\*\*\***



L/D

**d\*\***



d1

**X\*\***



d2

**XX**



Driver Type

### Example:

Metric: D14.00 L1000 d25X56WD

Inch: D0.551 L39.37 d0.984X2.205WD

\*\*\*\*\*

\*\*\*\*\* [Lot no.]